


# LUBING

## LUBING Touch Control

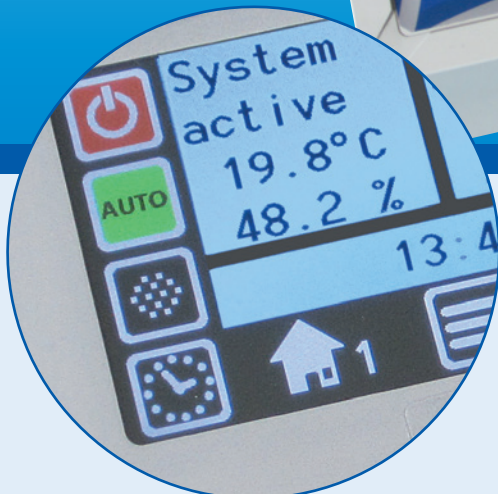

*The interactive display screen controller  
for LUBING system solutions*

# Main facts at a glance: LUBING Touch Control

LUBING Touch Controllers are distinguished by their intelligent system configurations and intuitive operating features. Frequently used functions are integrated as direct-access functions. Less often used and administrative functions are placed in subordinate menus. Basically, pictograms and simple menu structures ensure that all required functions can be understood and activated quickly and easily.


Status messages and instructions are displayed in context on the interactive display screen, and guide users through operations in a logical sequence. Controller functions are additionally secured by an integrated alarm function.

Operating functions can be expanded via CAN Bus. Updates are performed via SD card. A data logging functions can be integrated as an option.

## Clear symbols, simple menu structures

LUBING Touch Control is easy to use. The ergonomically designed menu interface supports an intuitive grasp of features and capabilities.

The main functions are made directly accessible by simple pictograms:

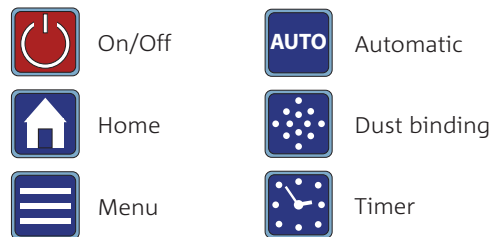

## Versions

LUBING Touch Controllers are available in several different versions. The version of the controller is printed on the front foil, and starts with "LC".

List of available versions:

Designation	Item	Application for the Top-Climate-System
LC-1	7740	1 house, without sensors
LC-2	7741	2 houses, without sensors
LCS-1	7742	1 houses, with sensors
LCS-2	7743	2 houses, with sensors
LCM	7744	Multi house controller for max. 8 boxes
LCM vario	7745	Multi house controller for max. 8 boxes for pump units with frequency converter
LCMS vario	7747	Multi house controller for max. 8 boxes for pump units with frequency converter and sensors
Extension box	7750	Extension box for LCM and LCM vario for 8 further boxes
Extension box	7751	Extension box for LCMS vario for 2 further boxes

These versions are designed for use with supply voltages ranging from 90 to 264 V 50/60 Hz.

**For further information: [www.lubing.com](http://www.lubing.com)**

Technical modifications reserved.

# LUBING

**Drinking-Systems  
Conveyor-Systems  
Climate-Systems**

**LUBING Maschinenfabrik GmbH & Co. KG**

Lubingstraße 6 · 49406 Barnstorf (Germany)  
Tel.: +49 (0) 54 42 - 98 79-0 · Fax: +49 (0) 54 42 - 98 79-33  
[www.lubing.com](http://www.lubing.com) · [info@lubing.com](mailto:info@lubing.com)